

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
10 July 2003 (10.07.2003)

PCT

(10) International Publication Number  
**WO 03/056620 A1**

(51) International Patent Classification<sup>7</sup>: **H01L 21/321**,  
C09G 1/02

(21) International Application Number: PCT/US02/40413

(22) International Filing Date:  
17 December 2002 (17.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/028,040 21 December 2001 (21.12.2001) US

(71) Applicant: **MICRON TECHNOLOGY, INC.** [US/US];  
8000 South Federal Way, Boise, ID 83707-0006 (US).

(72) Inventors: **SINHA, Nishant**; 4008 Federal Way #D-101,  
Boise, ID 83716 (US). **KLEIN, Rita, J.**; 11336 W. Divide  
Pass Drive, Boise, ID 83709 (US).

(74) Agent: **MUETING, Ann, M.**; Muetling, Raasch & Geb-  
hardt, P.A., P.O. Box 581415, Minneapolis, MN 55458-  
1415 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU,  
ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

**Published:**  
— with international search report

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*



**WO 03/056620 A1**

(54) Title: METHODS FOR PLANARIZATION OF GROUP VIII METAL-CONTAINING SURFACES USING COMPLEXING AGENTS

(57) Abstract: A planarization method includes providing a second and/or third row Group VIII metal-containing surface (preferably, a platinum-containing surface) and positioning it for contact with a polishing surface in the presence of a planarization composition that includes a complexing agent.

BEST AVAILABLE COPY

5                   METHODS FOR PLANARIZATION OF GROUP VIII METAL-  
CONTAINING SURFACES USING COMPLEXING AGENTS

Field of the Invention

10                   The present invention relates to methods for planarization of  
Group VIII metal-containing (preferably, platinum-containing) surfaces,  
particularly in the fabrication of semiconductor devices.

Background of the Invention

15                   Films of metals and metal oxides, particularly the heavier  
elements of Group VIII, are becoming important for a variety of electronic and  
electrochemical applications. This is at least because many of the Group VIII  
metal films are generally unreactive, resistant to oxidation or retard the  
diffusion of oxygen, and are good conductors. Oxides of certain of these  
metals also possess these properties, although perhaps to a different extent.

20                   Thus, films of Group VIII metals, their alloys, and metal oxides,  
particularly the second and third row metals (e.g., Ru, Os, Rh, Ir, Pd, and Pt)  
have suitable properties for a variety of uses in integrated circuits. For  
example, they can be used in integrated circuits for barrier materials, for  
example. They are particularly suitable for use as barrier layers between the  
dielectric material and the silicon substrate in memory devices. Furthermore,  
25                   they are suitable as the plate (i.e., electrode) itself in capacitors.

30                   Platinum is one of the candidates for use as an electrode for high  
dielectric capacitors. Capacitors are the basic charge storage devices in random  
access memory devices, such as dynamic random access memory (DRAM)  
devices, static random access memory (SRAM) devices, and now ferroelectric  
memory (FE RAM) devices. They consist of two conductors, such as parallel  
metal or polysilicon plates, which act as the electrodes (i.e., the storage node

electrode and the cell plate capacitor electrode), insulated from each other by a dielectric material (a ferroelectric dielectric material for FE RAMs). Thus, there is a continuing need for methods and materials for the processing of Group VIII metal-containing films, preferably, platinum-containing films.

5                   Many surfaces that result during the formation of Group VIII metal-containing films, particularly in the wafer fabrication of semiconductor devices, do not have uniform height, and therefore, the wafer thickness is also non-uniform. Further, surfaces may have defects such as crystal lattice damage, scratches, roughness, or embedded particles of dirt or dust. For various  
10                   fabrication processes to be performed, such as lithography and etching, height non-uniformities and defects at the surface of the wafer must be reduced or eliminated. Also, excess material may need to be removed to form a structure with selectivity relative to the underlying substrate. Various planarization techniques are available to provide such reduction and/or elimination. One  
15                   such planarization technique includes mechanical and/or chemical-mechanical polishing (abbreviated herein as "CMP").

                  The process of planarization is used to remove material, and preferably achieve a planar surface, over the entire chip and wafer, sometimes referred to as "global planarity." Conventionally, the process of planarization,  
20                   and particularly CMP, involves the use of a wafer holder that holds a wafer, a polishing pad, and an abrasive slurry that includes a dispersion of a plurality of abrasive particles in a liquid. The abrasive slurry is applied so that it contacts the interface of the wafer and the polishing pad. A table or platen has a polishing pad thereon. The polishing pad is applied to the wafer at a certain  
25                   pressure to perform the planarization. At least one of the wafer and a polishing pad are set in motion relative to the other. In some planarization processes, the wafer holder may or may not rotate, the table or platen may or may not rotate and/or the platen may be moved in a linear motion as opposed to rotating. There are numerous types of planarization units available which perform the  
30                   process in different manners. Alternatively, the polishing pad and abrasive slurry may be replaced by a fixed abrasive article that includes a plurality of abrasive particles dispersed within a binder adhered to at least one surface of a backing material.

The planarization of a surface that includes platinum and other Group VIII metals typically involves more mechanical than chemical action during a polishing process because they are relatively chemically inert and/or have relatively few volatile products. Such mechanical polishing uses alumina and silica particles. Unfortunately, mechanical polishing tends to cause the formation of defects (e.g., scratches and particles), both of which can be detected optically, rather than the clean removal of the platinum. Also, many commercially available abrasive slurries do not effectively planarize platinum or other Group VIII metal-containing surfaces either because no material is removed (which results in no change in resistance of the wafer) or the resultant surface has defects therein. For example, those abrasive slurries available under the trade designations KLEBOSOL 1508-50 and 30H50 and GRANITE MSW2000 (all available from Rodel, Phoenix, AZ), and other alumina-based slurries do not effectively remove platinum, although GRANITE MSW2000 does remove ruthenium and platinum, it leaves the surface with significant scratches and other defects and is not selective to the underlying substrate resulting in not being able to maintain the structure required. Certain of these compositions are believed to contain an oxidizer, although relatively large amounts (e.g., greater than about 10 weight-%) are typically included.

Thus, there is still a need for methods for planarizing an exposed surface of a substrate that includes platinum and/or other Group VIII metals, particularly in the fabrication of semiconductor devices.

#### Summary of the Invention

The present invention provides methods that overcome many of the problems associated with the planarization of a surface that includes platinum and/or another of the Group VIII second and third row metals (i.e., Groups 8, 9, and 10, preferably, Rh, Ru, Ir, Pd, and Pt). Such a surface is referred to herein as a platinum-containing surface, or more generally, a Group VIII metal-containing surface. A "Group VIII metal-containing surface" refers to an exposed region having a Group VIII metal (particularly, platinum) preferably present in an amount of at least about 10 atomic percent, more preferably at least about 20 atomic percent, and most preferably at least about

50 atomic percent, of the composition of the region, which may be provided as a layer, film, coating, etc., to be planarized (e.g., via chemical-mechanical or mechanical planarization or polishing) in accordance with the present invention. The surface preferably includes one or more Group VIII metals in elemental form or an alloy thereof (with each other and/or one or more other metals of the Periodic Table), as well as oxides, nitrides, and silicides thereof. More preferably, the surface includes (and most preferably, consists essentially of) one or more Group VIII metals in elemental form or an alloy of Group VIII metals only.

10                   The methods of the present invention involve planarizing a surface using a planarization composition that preferably includes a complexing agent therein (either dispersed or dissolved therein). Optionally, and preferably, an oxidizing agent is also included in the planarization composition.

                  Preferably, the complexing agent is present in the composition in an amount of at least about 0.01% by weight, more preferably no greater than about 10% by weight, and most preferably, in an amount of about 0.05% to about 5% by weight. A preferred group of complexing agents includes organic chelating acids, cyclic dienes, organic amines, or combinations thereof.

                  Herein, as is conventionally understood, "planarizing" or "planarization" refers to the removal of material from a surface, whether it be a large or small amount of material, either mechanically, chemically, or both. This also includes removing material by polishing. As used herein, "chemical-mechanical polishing" and "CMP" refer to a dual mechanism having both a chemical component and a mechanical component, wherein corrosion chemistry and fracture mechanics both play a roll in the removal of material, as in wafer polishing.

                  The planarization composition can optionally include abrasive particles, thereby resulting in an abrasive slurry, and be used in planarization techniques with conventional polishing pads that do not have abrasive particles embedded therein. Alternatively, the planarization composition without abrasive particles therein can be used with fixed abrasive articles (also referred to as abrasive polishing pads) in place of conventional polishing pads. Such fixed abrasive articles include a plurality of abrasive particles dispersed within a binder adhered to at least one surface of a backing

material. If the oxidizing agent is not stable in a composition with abrasive particles (i.e., an abrasive slurry), they may be provided by separate delivery systems and/or in separate compositions and mixed at the point of use.

5 In one aspect of the present invention, a planarization method is provided that includes: positioning a Group VIII metal-containing surface of a substrate (preferably, a semiconductor substrate or substrate assembly such as a wafer) to interface with a polishing pad; supplying a planarization composition in proximity to the interface; and planarizing the Group VIII metal-containing surface. The Group VIII metal is selected from the group consisting of  
10 rhodium, iridium, ruthenium, osmium, palladium, platinum, and combinations thereof

The planarization composition includes a complexing agent. In certain embodiments, the method is carried out in one step (i.e., without an intervening rinse step between the use of two different planarization  
15 compositions). In certain embodiments, the complexing agent includes a cyclic diene, an organic amine, or a combination thereof. In certain other embodiments, the planarization composition includes an organic acid and an amine.

In one aspect of the invention, there is provided a planarization  
20 method that includes: positioning a Group VIII metal-containing surface of a substrate to interface with a polishing surface, wherein the Group VIII metal is selected from the group consisting of rhodium, iridium, ruthenium, osmium, palladium, platinum, and combinations thereof; supplying a planarization composition in proximity to the interface; and planarizing the Group VIII  
25 metal-containing surface; wherein the planarization composition includes an organic amine and an organic chelating acid.

In another aspect of the invention, there is provided a planarization method that includes: positioning a Group VIII metal-containing surface of a substrate to interface with a polishing surface, wherein the Group  
30 VIII metal is selected from the group consisting of rhodium, iridium, ruthenium, osmium, palladium, platinum, and combinations thereof; supplying a planarization composition in proximity to the interface; and planarizing the Group VIII metal-containing surface; wherein the planarization composition

includes abrasive particles and a complexing agent; and further wherein a majority of the plurality of abrasive particles are CeO<sub>2</sub> abrasive particles.

In still another aspect of the invention, there is provided a planarization method that includes: positioning a Group VIII metal-containing surface of a substrate to interface with a polishing surface, wherein the Group VIII metal is selected from the group consisting of rhodium, iridium, ruthenium, osmium, palladium, platinum, and combinations thereof; supplying a planarization composition in proximity to the interface; and planarizing the Group VIII metal-containing surface; wherein the planarization composition includes a complexing agent selected from the group consisting of a cyclic diene, an organic amine, an organic chelating acid, and combinations thereof; and further wherein the method is carried out in one step.

In another aspect, a planarization method includes: providing a semiconductor substrate or substrate assembly including at least one region of a platinum-containing surface; providing a polishing surface; providing a planarization composition at an interface between the at least one region of platinum-containing surface and the polishing surface; and planarizing the at least one region of platinum-containing surface; wherein the planarization composition includes a complexing agent selected from the group consisting of a cyclic diene, an organic amine, and combinations thereof.

In still another aspect, a planarization method includes: providing a semiconductor substrate or substrate assembly including at least one region of a platinum-containing surface; providing a polishing surface; providing a planarization composition at an interface between the at least one region of platinum-containing surface and the polishing surface; and planarizing the at least one region of platinum-containing surface; wherein the planarization composition includes an organic amine and an organic chelating acid.

In another aspect, a planarization method includes: providing a semiconductor substrate assembly including at least one region of a platinum-containing surface; providing a polishing surface; providing a planarization composition at an interface between the at least one region of platinum-containing surface and the polishing surface; and planarizing the at least one region of platinum-containing surface; wherein the planarization composition

includes abrasive particles and a complexing agent; and further wherein a majority of the plurality of abrasive particles are CeO<sub>2</sub> abrasive particles.

5 In yet another aspect, a planarization method includes: providing a semiconductor substrate or substrate assembly including at least one region of a platinum-containing surface; providing a polishing surface; providing a planarization composition at an interface between the at least one region of platinum-containing surface and the polishing surface; and planarizing the at least one region of platinum-containing surface; wherein the planarization composition includes a complexing agent selected from the group consisting of  
10 a cyclic diene, an organic amine, an organic chelating acid, and combinations thereof; and further wherein the method is carried out in one step.

In still another aspect, a planarization method for use in forming a capacitor or barrier layer includes: providing a semiconductor substrate or substrate assembly having a patterned dielectric layer formed thereon and a  
15 Group VIII metal-containing layer formed over the patterned dielectric layer, wherein the Group VIII metal is selected from the group consisting of rhodium, iridium, ruthenium, osmium, palladium, platinum, and combinations thereof; positioning a first portion of a polishing surface for contact with the Group VIII metal-containing layer; providing a planarization composition in proximity to  
20 the contact between the polishing surface and the Group VIII metal-containing layer; and planarizing the Group VIII metal-containing layer; wherein the planarization composition includes a complexing agent selected from the group consisting of a cyclic diene, an organic amine, and combinations thereof.

The present invention also provides a planarization method for use  
25 in forming a capacitor or barrier layer that includes: providing a semiconductor substrate or substrate assembly having a patterned dielectric layer formed thereon and a Group VIII metal-containing layer formed over the patterned dielectric layer, wherein the Group VIII metal is selected from the group consisting of rhodium, iridium, ruthenium, osmium, palladium, platinum, and  
30 combinations thereof; positioning a first portion of a polishing surface for contact with the Group VIII metal-containing layer; providing a planarization composition in proximity to the contact between the polishing surface and the Group VIII metal-containing layer; and planarizing the Group VIII metal-



containing layer; wherein the planarization composition includes an organic amine and an organic chelating acid.

The present invention also provides a planarization method for use in forming a capacitor or barrier layer that includes: providing a semiconductor substrate or substrate assembly having a patterned dielectric layer formed thereon and a Group VIII metal-containing layer formed over the patterned dielectric layer, wherein the Group VIII metal is selected from the group consisting of rhodium, iridium, ruthenium, osmium, palladium, platinum, and combinations thereof; positioning a first portion of a polishing surface for contact with the Group VIII metal-containing layer; providing a planarization composition in proximity to the contact between the polishing surface and the Group VIII metal-containing layer; and planarizing the Group VIII metal-containing layer; wherein the planarization composition includes abrasive particles and a complexing agent; and further wherein a majority of the plurality of abrasive particles are CeO<sub>2</sub> abrasive particles.

In another aspect, a planarization method for use in forming a capacitor or barrier layer includes: providing a semiconductor substrate or substrate assembly having a patterned dielectric layer formed thereon and a Group VIII metal-containing layer formed over the patterned dielectric layer, wherein the Group VIII metal is selected from the group consisting of rhodium, iridium, ruthenium, osmium, palladium, platinum, and combinations thereof; positioning a first portion of a polishing surface for contact with the Group VIII metal-containing layer; providing a planarization composition in proximity to the contact between the polishing surface and the Group VIII metal-containing layer; and planarizing the Group VIII metal-containing layer; wherein the planarization composition includes a complexing agent selected from the group consisting of a cyclic diene, an organic amine, an organic chelating acid, and combinations thereof; and further wherein the method is carried out in one step.

As used herein, "semiconductor substrate or substrate assembly" refers to a semiconductor substrate such as a base semiconductor layer or a semiconductor substrate having one or more layers, structures, or regions formed thereon. A base semiconductor layer is typically the lowest layer of silicon material on a wafer or a silicon layer deposited on another material, such

as silicon on sapphire. When reference is made to a substrate assembly, various process steps may have been previously used to form or define regions, junctions, various structures or features, and openings such as capacitor plates or barriers for capacitors.

5

#### Brief Description of the Figures

Figures 1A and 1B are cross-sectional illustrations of one portion of a wafer before and after a planarization process has been performed in accordance with the present invention.

10

Figures 2A and 2B are cross-sectional illustrations of one portion of a wafer before and after a planarization process has been performed in accordance with the present invention.

#### Description of the Preferred Embodiments

15

The present invention provides methods of planarization of a surface that includes platinum and/or one or more of the other Group VIII metals. The Group VIII metals are also referred to as the Group VIII B elements or transition metals of Groups 8, 9, and 10 of the Periodic Table. The second and third row Group VIII B metals include Rh, Ru, Ir, Pd, Pt, and Os.

20

Preferably, surfaces that include Rh, Ru, Ir, Pd, and/or Pt can be planarized according to methods of the present invention. Such a surface is referred to herein as a Group VIII metal-containing surface (this refers to those containing second and/or third row transition metals).

25

Preferably, a "Group VIII metal-containing surface" refers to an exposed region having a Group VIII metal (particularly, platinum) present in an amount of at least about 10 atomic percent, more preferably at least about 20 atomic percent, and most preferably at least about 50 atomic percent, of the composition of the region, which may be provided as a layer, film, coating, etc., to be planarized (e.g., via chemical-mechanical or mechanical planarization or polishing) in accordance with the present invention.

30

The planarization of such surfaces, particularly a surface that includes platinum, typically involves mechanical methods with relatively hard particles such as alumina ( $\text{Al}_2\text{O}_3$ ) and/or silica ( $\text{SiO}_2$ ) particles, which by

themselves can cause severe smearing, slow removal rates, and defects, rather than the clean removal of the material. Use of a planarization composition that includes a complexing agent either in combination with a plurality of abrasive particles in the composition or with a fixed abrasive article reduces, and often eliminates, the problem of defect formation, smearing, and often results in increased selectivity and removal rates.

Significantly, the methods of the present invention are particularly advantageous in platinum-containing or other second and third row Group VIII metal-containing materials (e.g., metals, alloys, oxides) from a surface in preference to materials containing other metals. This is important in selectively removing material from platinum-containing or other second and third row Group VIII metal-containing layers without removing, for example, significant amounts of underlying layers, such as oxide layers and nitride layers (e.g., TEOS or BPSG layers). Preferably, the selectivity for removal of material from a second and third row Group VIII metal-containing surface relative to materials containing other metals (e.g., BPSG or TEOS) is at least about 10:1, and more preferably, within a range of about 20:1 to about 100:1, depending on the chemistry and process conditions.

The planarization composition can be used in slurry planarization (i.e., in a conventional planarization process in which the planarization composition includes the abrasive particles with a polishing pad that does not include abrasive particles) or in fixed abrasive planarization. Thus, as used herein, a "polishing surface" refers to a polishing pad or a fixed abrasive article. Preferably, slurry planarization is used in the methods of the present invention. Preferably, when present in the planarization composition, the composition includes the abrasive particles in an amount of about 1% by weight to about 30% by weight, and more preferably, about 1% by weight to about 15% by weight, based on the total weight of the composition.

Typically, lower amounts of abrasive particles provide better selectivity of the Group VIII metal-containing surface relative to an oxide layer

such as BPSG. Generally, however, the optimum level of selectivity for a particular metal is obtained by balancing the type and amount of abrasive particles, the type and amount of complexing agent, and the pH of the composition.

5                   A wide variety of abrasive particles can be used either in an abrasive slurry or in a fixed abrasive article. Typically, such abrasive particles range in particle size (i.e., the largest dimension of the particle) on average from about 10 nanometers (nm) to about 5000 nm, and more often about 30 nm to about 1000 nm. For preferred embodiments, suitable abrasive particles have an  
10                   average particle size of about 100 nm to about 300 nm.

                  Examples of suitable abrasive particles include, but are not limited to, alumina ( $\text{Al}_2\text{O}_3$ ), silica ( $\text{SiO}_2$ ), ceria ( $\text{CeO}_2$ ), titania ( $\text{TiO}_2$ ), zirconia ( $\text{ZrO}_2$ ), manganese dioxide ( $\text{MnO}_2$ ), and tantalum dioxide ( $\text{TaO}_2$ ). Preferred abrasive particles include alumina ( $\text{Al}_2\text{O}_3$ ), silica ( $\text{SiO}_2$ ), ceria ( $\text{CeO}_2$ ), titania ( $\text{TiO}_2$ ), and  
15                   zirconia ( $\text{ZrO}_2$ ). Various combinations of abrasive particles can be used if desired.

                  Preferably, for certain embodiments, abrasive particles include those that have a hardness of no greater than about 9 Mohs, and more preferably no less than about 6 Mohs. These include, for example, ceria ( $\text{CeO}_2$ ), which has  
20                   a hardness of about 6 Mohs, alumina ( $\text{Al}_2\text{O}_3$ ), which has a hardness of about 9 Mohs, and silica ( $\text{Si}_2\text{O}_3$ ), which has a hardness of about 7.

                  In certain methods in accordance with the present invention, preferably, a majority of the plurality of abrasive particles (either in an abrasive slurry or in a fixed abrasive article) are  $\text{CeO}_2$  particles. This typically results in  
25                   reduced formation of defects. In certain other methods in accordance with the present invention, preferably, a majority of the plurality of abrasive particles (either in an abrasive slurry or in a fixed abrasive article) have a hardness of about 8 Mohs to about 9 Mohs. This typically results in increased removal rates.

                  For other embodiments of the present invention, harder particles  
30                   like alumina particles with certain complexing agents such as organic acid oxidizers work more effectively than ceria or silica with respect to selective removal of the Group VIII metal-containing surface.

                  The planarization composition includes a complexing agent. The

complexing agent is typically a solid or liquid at room temperature. It can be dispersed or dissolved in the liquid medium of the planarization composition, which typically includes water, although other solvents or nonsolvating liquid media can also be used in place of water or in addition to water, such as glycols.

5                   The complexing agents are compounds that form good ligands with the Group VIII metals. Compounds that form chelating ligands are particularly desirable, although this is not a requirement. For example, although ammonium hydroxide is a good ligand for platinum, it did not remove any significant amount of metal. Although not intending to be limiting, it is  
10                   believed that the complexing agent forms a soluble complex with the metal and/or oxidizes the metal to form a passivation layer thereby assisting in its removal.

                  Examples of suitable complexing agents include organic chelating acids or their salts, cyclic dienes, and amines. Examples of suitable organic  
15                   chelating acids include, but are not limited to, acetic acid, ascorbic acid, citric acid, propenoic acid, tartaric acid, succinic acid. Examples of suitable cyclic dienes, which may be substituted or unsubstituted, include 1,5-cyclooctadiene (COD) and 1,5-dimethyl-1,5-cyclooctadiene. Examples of suitable organic amines include ethylamine ( $\text{EtNH}_2$ ), methylamine ( $\text{MeNH}_2$ ), triethylamine  
20                   ( $\text{Et}_3\text{N}$ ), and trimethylamine ( $\text{Me}_3\text{N}$ ). Various combinations of complexing agents can be used if desired. A preferred group of complexing agents include acetic acid and salts thereof (e.g., sodium acetate).

                  Preferably, the complexing agent is present in the composition in an amount of at least about 0.01% by weight, more preferably no greater than  
25                   about 10% by weight, and most preferably, in an amount of about 0.05% to about 5% by weight, based on the total weight of the composition.

                  For various desired effects, a planarization composition can optionally and preferably include an oxidizing agent to aid in the planarization. Examples of suitable planarization compositions are disclosed in Applicant's  
30                   Assignee's copending U.S. Patent Applications: Serial Number 10/028,249, filed on December 21, 2001 entitled METHODS FOR PLANARIZATION OF GROUP VIII METAL-CONTAINING SURFACES USING OXIDIZING AGENTS; and Serial Number 10/032,357, filed on December 21, 2001 entitled

## METHODS FOR PLANARIZATION OF GROUP VIII METAL-CONTAINING SURFACES USING OXIDIZING GASES.

Preferably, the oxidizing agent is one that has a standard oxidation potential of at least about 1.4 versus standard hydrogen electrode at 25°C.

5 Examples include peroxides (e.g., hydrogen peroxide), nitrates (e.g., ceric ammonium nitrate (( $\text{NH}_4$ )<sub>2</sub>Ce(NO<sub>3</sub>)<sub>6</sub>) and ceric nitrate (Ce(NO<sub>3</sub>)<sub>4</sub>)), permanganates (e.g., KMnO<sub>4</sub>), bromates (e.g., KBrO<sub>4</sub>), perchlorates (e.g., KClO<sub>4</sub>), hypochlorites (e.g., HClO and KClO), or combinations thereof. A preferred group of oxidizing agents include hydrogen peroxide, ceric  
10 ammonium nitrate, ceric nitrate, and potassium permanganate. Preferably, the oxidizing agent is present in the composition in an amount of no greater than about 10% by weight, and more preferably, in an amount of about 0.1% to about 1% by weight.

Other additives can be included as well for desired effects. These  
15 include, but are not limited to, a surfactant (e.g., polyethylene glycol, polyoxyethylene ether, or polypropylene glycol) to enhance wettability and reduce friction, a thickener (e.g., CARBOPOL) to achieve a desired viscosity, a buffering agent (e.g., H<sub>2</sub>SO<sub>4</sub>, NH<sub>4</sub>OH, acetate, and acetic acid) to achieve a desired pH, etc. Preferably, the composition is an aqueous solution of these  
20 components. More preferably, the aqueous planarization composition has an acidic pH.

The various components of the planarization composition are combined in a liquid medium and mixed. The various components may be dissolved or dispersed in the liquid medium, which typically includes water but  
25 may include organic solvents if desired. Alternatively, if there are compatibility problems or storage problems, the various components of the planarization composition can be combined at the site of planarization. This includes any abrasive particles that might be used to form a slurry.

For certain embodiments, the planarization composition includes a  
30 plurality of abrasive particles. For other embodiments, the planarization composition is essentially free of abrasive particles when supplied to the interface of the fixed abrasive article and the workpiece surface. However, in these latter embodiments, it is contemplated that planarization is accomplished

by one or both of the fixed abrasive article and/or abrasive particles that may be removed from the fixed abrasive article at the fixed abrasive/surface interface in combination with the planarization composition. In any event, abrasive particles are typically not present in the composition as initially applied, i.e.,  
5 they are not supplied from a source external to the polishing interface.

Preferably, a method in accordance with the present invention is conducted at atmospheric pressure and at a temperature of about 40°F (about 4°C) to about 145°F (about 63°C), and more preferably at a temperature of about 75°F (24°C) to about 115°F (46°C). In many instances, however, it  
10 would be desirable to maintain a temperature at or below ambient temperature during planarization of Group VIII metal with a fixed abrasive article. This is seldom practical in slurry planarization (i.e., in a conventional planarization process in which the planarization composition includes the abrasive particles) where a lower slurry temperature likely results in poor dispersion of abrasive  
15 particles in the slurry composition during planarization. Accordingly, elevated temperatures are typically utilized during slurry planarization.

Various planarization assemblies or units for performing methods of the invention are readily available and are clearly contemplated by the scope of the present invention as described in the accompanying claims. Such  
20 planarization assemblies can create an interface between a polishing pad or a fixed abrasive article and the substrate surface (e.g., wafer surface) in various manners, e.g., rotation, movement, pressure, etc., to achieve planarization. A planarization composition is typically introduced at or near the interface, by a variety of methods such as by dripping, spraying, or other dispensing means, or  
25 by presoaking a polishing pad, although other locations and methods of introduction can be used.

In a typical planarizing machine, a polishing pad or fixed abrasive article is fixed on a platen or table, a carrier assembly that includes a substrate holder to support the substrate (e.g., wafer) typically using suction, and a drive  
30 assembly to rotate and/or reciprocate the platen and/or a drive assembly to rotate and/or translate the substrate holder during planarization. Thus, conventional planarizing machines rotate the carrier assembly, the polishing pad or fixed abrasive article, or both the carrier assembly and the polishing pad

or fixed abrasive article. In general, the planarizing machines are used to produce a planarization reaction product at the surface of a substrate whose hardness is less than the hardness of the abrasive particles and whose adhesion to the substrate is less than the original surface material; and to remove the reaction produce using the abrasive particles.

Typically, the polishing pads, with or without abrasive particles embedded therein, are disk-shaped and rotatable about a fixed plane and axis at constant or variable speeds. Typically, the speed of rotation ranges from about 2 revolutions per minute (rpm) to about 200 rpm.

Typically, a polishing pad is presoaked and continually rewet with the planarization composition. If the polishing pad does not include abrasive particles embedded therein, the planarization composition includes abrasive particles, which is then referred to as an abrasive slurry. The planarization composition may be applied to the interface between a polishing pad and a substrate surface using a variety of techniques. For example, the component parts of the composition may be applied separately and mixed at the interface or immediately before contacting the interface. The planarization composition can be applied by pumping it through the pad. Alternatively, it can be applied at the leading edge of the pad, although this may not provide uniform distribution of the planarization composition across the surface being planarized, which is desirable.

The polishing pad can be any of a wide variety of conventional polishing pads that are used with abrasive slurries. They can be made from a material such as polyurethane, polyester, acrylic, acrylic ester copolymers, polytetrafluoroethylene, polypropylene, polyethylene, cellulose, cellulose esters, polamides, polyimides, polysiloxane, polycarbonates, epoxides, phenolic resins, etc. They include, for example, a polyurethane-based foam material, wherein the foam cell walls of the pad aid in removal of reaction products at the wafer surface and the pores within the pad assist in supplying slurry to the pad/wafer interface. They can include convex or concave features, which can be formed by embossing a surface pattern. For example, a polishing pad can have continuous grooves in concentric ellipses in the surface of the pad for more uniform slurry delivery and more effective debris removal. Commercially



available polishing pads can be obtained under the trade designations "URII," "Sycamore," and "Polytex" from Rodel, Phoenix, AZ. Examples of polishing pads are also disclosed in U.S. Pat. No. 6,039,633 (Chopra).

5 In general, a fixed abrasive article includes a plurality of abrasive particles dispersed within a binder that forms a three-dimensional fixed abrasive element that is adhered to one surface of a backing material. They are described, for example, in U.S. Patent No. 5,692,950 (Rutherford, et al.) and International Patent Publication WO 98/06541. Commercially available fixed abrasive articles can be obtained from Tokyo Sumitsu Kageki and Ebera  
10 Corporation, both of Japan, and Minnesota Mining and Manufacturing Company (3M Company) of St. Paul, MN. An example of a preferred fixed abrasive article is a ceria-based pad commercially available from 3M Company under the trade designation "SWR 159." Such fixed abrasive articles can be used with a planarization composition as described herein with or without  
15 abrasive particles in the planarization composition.

It is highly desirable to have a high polishing rate (i.e., the rate at which material is removed from the substrate) to reduce the duration of each planarizing cycle, the polishing rate is preferably uniform across the substrate to produce a uniformly planar surface. Preferably, the polishing rate is controlled  
20 to provide accurate, reproducible results. Also, preferably, the planarization process is carried out in one cycle (i.e., one step). That is, for the removal of any material from a particular surface, there is only one planarization cycle without any intervening rinse cycles. This planarization process is then typically followed by a post-planarization clean process in which abrasive  
25 particles are not used.

The figures provide further information about the methods of the invention. Figure 1A illustrates one portion of a wafer 10 prior to planarization in accordance with the present invention having features that are filled with the material to be removed through planarization. The wafer portion 10 includes a  
30 substrate assembly 12 having junctions 16 formed thereon. A capacitor and/or barrier layer material 19 is then formed over the substrate assembly 12 and the junctions 16. The capacitor and/or barrier layer material 19 may be any conductive material such as platinum or any other suitable conductive second or

third row Group VIII metal-containing capacitor and/or barrier material.

Generally, as shown in Figure 1A, the nonplanar upper surface 13 of capacitor and/or barrier layer 19 is subjected to planarization or other processing in

accordance with the present invention. The resulting wafer 10, which is shown

5 in Figure 1B, includes an upper surface 17 planarized such that the thickness of the wafer 10 is substantially uniform across the entire wafer 10 so that the wafer now includes a capacitor and/or barrier structure layer 14.

Figure 2A illustrates one portion of a wafer 20 prior to planarization in accordance with the present invention having features that have

10 a conformal layer of the material to be removed through planarization. The wafer portion 20 includes a substrate assembly 22 having a patterned dielectric

layer 26 formed thereon. Such a patterned dielectric layer 26 can be used in a variety of structures, particularly a capacitor structure. The patterned dielectric

layer 26 can be formed of any material that provides electrical isolation

15 between metal regions (e.g., silicon dioxide, silicon nitride, or BPSG). An electrode layer 29 is then formed over the substrate assembly 22 and the

patterned dielectric layer 26. The electrode layer 29 may be platinum or any other suitable conductive second or third row Group VIIIB or Group IB metal-containing material. Generally, as shown in Figure 2A, the nonplanar upper

20 surface 23 of electrode layer 29 is subjected to planarization or other processing in accordance with the present invention. The resulting wafer 20, as shown in

Figure 2B, includes an upper surface 27 planarized such that the thickness of the wafer 20 is substantially uniform across the entire wafer 20 so that the wafer

now includes electrically conducting regions 24 isolated within the patterned

25 dielectric material 26 forming a capacitor structure. If desired, prior to planarization, the conformal layer 29 and openings 24 can be covered with a photoresist or other material that is removed after the planarization so the abrasive does not fall into the openings 24.

These figures are shown only to illustrate a surface having

30 nonuniformities, such as height differences, in the fabrication of semiconductor devices. The present invention is not limited to use with nonplanar surfaces, such as that shown in figures. The present invention is also beneficial for use with substantially planar surfaces. For example, the methods in accordance

with the present invention is beneficial during the whole planarization process, even at the end of the process when the surface being planarized is in a substantially planar state.

5 The following examples are offered to further illustrate the various specific and preferred embodiments and techniques. It should be understood, however, that many variations and modifications may be made while remaining within the scope of the present invention.

### Examples

10

#### Example 1

A test sample was cut from a wafer containing a blanket layer of 2700 Å of platinum. Several locations on the sample were measured for sheet resistance before any polishing (four points measured), directly correlating the metal thickness to the sheet resistance. A slurry was prepared by  
15 addition of 0.5 milliliter (0.5 ml) of glacial acetic acid and 80ml DIW to 20 ml of Rodel's CMP slurry containing Al<sub>2</sub>O<sub>3</sub> as the abrasive (GRANITE MSW2000 Part A). The sample was fixed to the carrier on a Beuhler Minimet 1000 polisher and was polished on a Rodel polishing pad upon which several milliliters of the prepared slurry was  
20 added. Polishing was carried out using a pressure of 15 pounds and a speed of 50 revolutions per minute (rpm). After 2 minutes the sample was rinsed and dried, and the sheet resistance measured again. The higher sheet resistance values (four points measured) yielded a calculated estimate of 125 Å of film removed (or a removal rate of approximately 62.5 Å per minute). By  
25 comparison, the same slurry without the added glacial acetic acid yielded little change in the sheet resistance of a similar sample, and caused only scratches and some areas of film delaminated from the substrate. Also, the slurry without acetic acid had poor selectivity relative to the underlying oxide film – on the order of 1:1 vs. 6:1 with acetic acid.

30

#### Example 2

A test sample was cut from a wafer containing a blanket layer of 2700 Å of platinum. Several locations on the sample were measured for sheet

resistance before any polishing (four points measured), directly correlating the metal thickness to the sheet resistance. A slurry was prepared by addition of 0.3 milliliter (0.3 ml) of hydrogen peroxide and 0.5 ml glacial acetic acid to 80 ml of water and 20 ml of Rodel's CMP slurry containing  $\text{Al}_2\text{O}_3$  as the abrasive (GRANITE MSW2000 Part A). The sample was fixed to the carrier on a Beuhler Minimet 1000 polisher and was polished on a Rodel polishing pad upon which several milliliters of the prepared slurry was added. Polishing was carried out using a pressure of 15 pounds and a speed of 50 revolutions per minute (rpm). After 2 minutes the sample was rinsed and dried, and the sheet resistance measured again. The higher sheet resistance values (four points measured) yielded a calculated estimate of 293 Å of film removed (or a removal rate of approximately 146.5 Å per minute). By comparison, the same slurry without the added hydrogen peroxide and glacial acetic acid yielded little change in the sheet resistance of a similar sample, and caused only scratches and some areas of film delaminated from the substrate. Also selectivity to oxide was poor. With only hydrogen peroxide removal rate was lower and selectivity was poorer.

### Example 3

A test sample was cut from a wafer containing a blanket layer of 2700 Å of platinum. Several locations on the sample were measured for sheet resistance before any polishing (four points measured), directly correlating the metal thickness to the sheet resistance. A slurry was prepared by addition of 0.5 milliliter (0.5 ml) of triethylamine to 80 ml of water and 20 ml of Rodel's CMP slurry containing  $\text{Al}_2\text{O}_3$  as the abrasive (GRANITE MSW2000 Part A). The sample was fixed to the carrier on a Beuhler Minimet 1000 polisher and was polished on a Rodel polishing pad upon which several milliliters of the prepared slurry was added. Polishing was carried out using a pressure of 15 pounds and a speed of 50 revolutions per minute (rpm). After 2 minutes the sample was rinsed and dried, and the sheet resistance measured again. The higher sheet resistance values (four points measured) yielded a calculated estimate of 185 Å of film removed (or a removal rate of approximately 92.5 Å per minute). By comparison, the same slurry without the added triethylamine

yielded little change in the sheet resistance of a similar sample, and caused only scratches and some areas of film delaminated from the substrate.

#### Example 4

5                   A test sample was cut from a wafer containing a blanket layer of  
2700 Å of platinum. Several locations on the sample were measured for sheet  
resistance before any polishing (four points measured), directly correlating the  
metal thickness to the sheet resistance. A slurry was prepared by addition of  
0.5 milliliter (0.5 ml) of 1 Normal Ascorbic acid to 80 ml of water and 20 ml of  
10 Rodel's CMP slurry containing  $\text{Al}_2\text{O}_3$  as the abrasive (GRANITE MSW2000  
Part A). The sample was fixed to the carrier on a Beuhler Minimet 1000  
polisher and was polished on a Rodel polishing pad upon which several  
milliliters of the prepared slurry was added. Polishing was carried out using a  
pressure of 15 pounds and a speed of 50 revolutions per minute (rpm). After 2  
15 minutes the sample was rinsed and dried, and the sheet resistance measured  
again. The higher sheet resistance values (four points measured) yielded a  
calculated estimate of 244 Å of film removed (or a removal rate of  
approximately 122 Å per minute). By comparison, the same slurry without the  
added ascorbic acid yielded little change in the sheet resistance of a similar  
20 sample, and caused only scratches and some areas of film delaminated from the  
substrate.

#### Example 5

25                   A test sample was cut from a wafer containing a blanket layer of  
2700 Å of platinum. Several locations on the sample were measured for sheet  
resistance before any polishing (four points measured), directly correlating the  
metal thickness to the sheet resistance. A slurry was prepared by addition of  
0.5 milliliter (0.5 ml) of triethylamine and 0.5 ml of 1N ascorbic acid to 80 ml  
of water and 20 ml of Rodel's CMP slurry containing  $\text{Al}_2\text{O}_3$  as the abrasive  
30 (GRANITE MSW2000 Part A). The sample was fixed to the carrier on a  
Beuhler Minimet 1000 polisher and was polished on a Rodel polishing pad  
upon which several milliliters of the prepared slurry was added. Polishing was  
carried out using a pressure of 15 pounds and a speed of 50 revolutions per

minute (rpm). After 2 minutes the sample was rinsed and dried, and the sheet resistance measured again. The higher sheet resistance values (four points measured) yielded a calculated estimate of 462 Å of film removed (or a removal rate of approximately 231 Å per minute). By comparison, the same slurry without the added triethylamine and ascorbic acid yielded little change in the sheet resistance of a similar sample, and caused only scratches and some areas of film delaminated from the substrate.

#### Example 6

A test sample was cut from a wafer containing a blanket layer of 2700 Å of platinum. Several locations on the sample were measured for sheet resistance before any polishing (four points measured), directly correlating the metal thickness to the sheet resistance. A slurry was prepared by addition of 1.0 milliliter (1.0 ml) of 1,5-dimethyl-1,5-cyclooctadiene to 80 ml of water and 20 ml of Rodel's CMP slurry containing Al<sub>2</sub>O<sub>3</sub> as the abrasive (GRANITE MSW2000 Part A). The sample was fixed to the carrier on a Beuhler Minimet 1000 polisher and was polished on a Rodel polishing pad upon which several milliliters of the prepared slurry was added. Polishing was carried out using a pressure of 15 pounds and a speed of 50 revolutions per minute (rpm). After 2 minutes the sample was rinsed and dried, and the sheet resistance measured again. The higher sheet resistance values (four points measured) yielded a calculated estimate of 249 Å of film removed (or a removal rate of approximately 124.5 Å per minute). By comparison, the same slurry without the added 1,5-dimethyl-1,5-cyclooctadiene yielded little change in the sheet resistance of a similar sample, and caused only scratches and some areas of film delaminated from the substrate.

The foregoing detailed description and examples have been given for clarity of understanding only. No unnecessary limitations are to be understood therefrom. The invention is not limited to the exact details shown and described, for variations obvious to one skilled in the art will be included within the invention defined by the claims. For example, while the description above focused on planarization of semiconductor-based substrates, the

compositions and methods of the invention are also applicable to, for example, polishing glasses and contact lenses, as one of many other possible applications.

The complete disclosures of all patents, patent documents, and publications listed herein are incorporated by reference, as if each were individually

5 incorporated by reference.

## What Is Claimed Is:

1. A planarization method comprising:
  - positioning a Group VIII metal-containing surface of a substrate to  
5 interface with a polishing surface, wherein the Group VIII metal is  
selected from the group of rhodium, iridium, ruthenium, osmium,  
palladium, platinum, and combinations thereof;
  - supplying a planarization composition in proximity to the  
interface; and
  - 10 planarizing the Group VIII metal-containing surface;  
wherein the planarization composition comprises a complexing  
agent selected from the group of a cyclic diene, an organic amine, and  
combinations thereof.
- 15 2. The method of claim 1 wherein the Group VIII metal is present in an  
amount of about 50 atomic percent or more.
3. The method of claim 2 wherein the Group VIII metal-containing  
surface of the substrate comprises a Group VIII metal in elemental form  
20 or an alloy thereof.
4. The method of claim 3 wherein the Group VIII metal-containing surface  
comprises elemental platinum or a platinum alloy.
- 25 5. The method of claim 4 wherein the Group VIII metal-containing surface  
comprises elemental platinum.
6. The method of claim 1 wherein the planarization composition further  
comprises an oxidizing agent.
- 30 7. The method of claim 6 wherein the oxidizing agent is selected from the  
group consisting of a peroxide, a nitrate, a permanganate, and a  
combination thereof.



8. The method of claim 1 wherein the polishing surface comprises a polishing pad and the planarization composition comprises a plurality of abrasive particles.
- 5
9. The method of claim 1 wherein the planarization composition comprises a plurality of abrasive particles having a hardness of no greater than about 9 Mohs.
- 10
10. The method of claim 9 wherein the plurality of abrasive particles comprise  $\text{CeO}_2$ ,  $\text{Al}_2\text{O}_3$ ,  $\text{SiO}_2$ , or combinations thereof.
11. The method of claim 1 wherein the substrate is a semiconductor substrate or substrate assembly.
- 15
12. The method of claim 1 wherein the Group VIII metal-containing surface is removed relative to an oxide layer at a selectivity ratio of at least about 10:1.
- 20
13. The method of claim 1 wherein the cyclic diene is selected from the group consisting of 1,5-cyclooctadiene (COD), 1,5-dimethyl-1,5-cyclooctadiene, and a combination thereof.
14. The method of claim 1 wherein the organic amine is selected from the group ethylamine, methylamine, triethylamine, trimethylamine, and combinations thereof.
- 25
15. The method of claim 1 wherein the polishing surface comprises a fixed abrasive article.
- 30
16. A planarization method comprising:  
positioning a Group VIII metal-containing surface of a substrate to interface with a polishing surface, wherein the Group VIII metal is selected from the group consisting of rhodium, iridium, ruthenium,

- osmium, palladium, platinum, and combinations thereof;  
supplying a planarization composition in proximity to the  
interface; and  
planarizing the Group VIII metal-containing surface;  
5 wherein the planarization composition comprises an organic  
amine and an organic chelating acid.
17. The method of claim 16 wherein the Group VIII metal is present in an  
amount of about 50 atomic percent or more.
- 10 18. The method of claim 16 wherein the Group VIII metal-containing  
surface comprises elemental platinum.
19. The method of claim 16 wherein the planarization composition further  
15 comprises an oxidizing agent.
20. The method of claim 19 wherein the oxidizing agent is selected from the  
group consisting of a peroxide, a nitrate, a permanganate, and a  
combination thereof.
- 20 21. The method of claim 16 wherein the polishing surface comprises a  
polishing pad and the planarization composition comprises a plurality of  
abrasive particles.
- 25 22. The method of claim 16 wherein the planarization composition  
comprises a plurality of abrasive particles having a hardness of no  
greater than about 9 Mohs.
23. The method of claim 22 wherein the plurality of abrasive particles  
30 comprise  $\text{CeO}_2$ ,  $\text{Al}_2\text{O}_3$ ,  $\text{SiO}_2$ , or combinations thereof.
24. The method of claim 16 wherein the substrate is a semiconductor  
substrate or substrate assembly.

25. The method of claim 16 wherein the organic chelating acid is selected from the group consisting of acetic acid, ascorbic acid, citric acid, propenoic acid, tartaric acid, succinic acid, and combinations thereof.
- 5
26. The method of claim 16 wherein the organic amine is selected from the group consisting of ethylamine, methylamine, triethylamine, trimethylamine, and combinations thereof.
- 10
27. The method of claim 16 wherein the polishing surface comprises a fixed abrasive article.
28. A planarization method comprising:
- 15
- positioning a Group VIII metal-containing surface of a substrate to interface with a polishing surface, wherein the Group VIII metal is selected from the group consisting of rhodium, iridium, ruthenium, osmium, palladium, platinum, and combinations thereof;
- supplying a planarization composition in proximity to the interface; and
- 20
- planarizing the Group VIII metal-containing surface;
- wherein the planarization composition comprises abrasive particles and a complexing agent; and further wherein a majority of the plurality of abrasive particles are CeO<sub>2</sub> abrasive particles.
- 25
29. The method of claim 28 wherein the Group VIII metal is present in an amount of about 50 atomic percent or more.
30. The method of claim 28 wherein the Group VIII metal-containing surface comprises elemental ruthenium.
- 30
31. The method of claim 28 wherein the planarization composition further comprises an oxidizing agent.

32. The method of claim 28 wherein the complexing agent is selected from the group consisting of an organic chelating acid, an organic amine, a cyclic diene, and combinations thereof.
- 5 33. The method of claim 32 wherein the organic chelating acid is selected from the group consisting of acetic acid, ascorbic acid, citric acid, propenoic acid, tartaric acid, succinic acid, and combinations thereof.
- 10 34. The method of claim 32 wherein the organic amine is selected from the group consisting of ethylamine, methylamine, triethylamine, trimethylamine, and combinations thereof.
- 15 35. The method of claim 32 wherein the cyclic diene is selected from the group consisting of 1,5-cyclooctadiene (COD), 1,5-dimethyl-1,5-cyclooctadiene, and a combination thereof.
36. The method of claim 28 wherein the polishing surface comprises a polishing pad.
- 20 37. A planarization method comprising:  
positioning a Group VIII metal-containing surface of a substrate to interface with a polishing surface, wherein the Group VIII metal is selected from the group consisting of rhodium, iridium, ruthenium, osmium, palladium, platinum, and combinations thereof;  
25 supplying a planarization composition in proximity to the interface; and  
planarizing the Group VIII metal-containing surface;  
wherein the planarization composition comprises a complexing agent selected from the group consisting of a cyclic diene, an organic  
30 amine, an organic chelating acid, and combinations thereof; and  
further wherein the method is carried out in one step.

38. The method of claim 37 wherein the planarization composition further comprises an oxidizing agent.
39. A planarization method comprising:
- 5            providing a semiconductor substrate or substrate assembly including at least one region of a platinum-containing surface;
- providing a polishing surface;
- providing a planarization composition at an interface between the at least one region of platinum-containing surface and the polishing
- 10          surface;
- and
- planarizing the at least one region of platinum-containing surface;
- wherein the planarization composition comprises a complexing agent selected from the group consisting of a cyclic diene, an organic
- 15          amine, and combinations thereof.
40. The method of claim 39 wherein the planarization composition further comprises an oxidizing agent.
- 20          41. A planarization method comprising:
- providing a semiconductor substrate or substrate assembly including at least one region of a platinum-containing surface;
- providing a polishing surface;
- providing a planarization composition at an interface between the at least one region of platinum-containing surface and the polishing
- 25          surface;
- and
- planarizing the at least one region of platinum-containing surface;
- wherein the planarization composition comprises an organic
- 30          amine and an organic chelating acid.
42. The method of claim 41 wherein the planarization composition further comprises an oxidizing agent.

43. A planarization method comprising:  
providing a semiconductor substrate assembly including at least  
one region of a platinum-containing surface;  
5 providing a polishing surface;  
providing a planarization composition at an interface between the  
at least one region of platinum-containing surface and the polishing  
surface;  
and  
10 planarizing the at least one region of platinum-containing surface;  
wherein the planarization composition comprises abrasive  
particles and a complexing agent; and  
further wherein a majority of the plurality of abrasive particles are  
CeO<sub>2</sub> abrasive particles.  
15
44. The method of claim 43 wherein the planarization composition further  
comprises an oxidizing agent.
45. The method of claim 43 wherein the polishing surface comprises a  
20 polishing pad.
46. A planarization method comprising:  
providing a semiconductor substrate or substrate assembly  
including at least one region of a platinum-containing surface;  
25 providing a polishing surface;  
providing a planarization composition at an interface between the  
at least one region of platinum-containing surface and the polishing  
surface; and  
planarizing the at least one region of platinum-containing surface;  
30 wherein the planarization composition comprises a complexing  
agent selected from the group consisting of a cyclic diene, an organic  
amine, an organic chelating acid, and combinations thereof; and  
further wherein the method is carried out in one step.

47. The method of claim 44 wherein the planarization composition further comprises an oxidizing agent.

48. A planarization method for use in forming a capacitor or barrier layer,  
5 the method comprising:
- providing a semiconductor substrate or substrate assembly having a patterned dielectric layer formed thereon and a Group VIII metal-containing layer formed over the patterned dielectric layer, wherein the Group VIII metal is selected from the group consisting of rhodium,  
10 iridium, ruthenium, osmium, palladium, platinum, and combinations thereof;
  - positioning a first portion of a polishing surface for contact with the Group VIII metal-containing layer;
  - providing a planarization composition in proximity to the contact  
15 between the polishing surface and the Group VIII metal-containing layer; and
  - planarizing the Group VIII metal-containing layer;
  - wherein the planarization composition comprises a complexing agent selected from the group consisting of a cyclic diene, an organic  
20 amine, and combinations thereof.

49. The method of claim 48 wherein the planarization composition further comprises an oxidizing agent.

- 25 50. A planarization method for use in forming a capacitor or barrier layer, the method comprising:
- providing a semiconductor substrate or substrate assembly having a patterned dielectric layer formed thereon and a Group VIII metal-containing layer formed over the patterned dielectric layer, wherein the  
30 Group VIII metal is selected from the group consisting of rhodium, iridium, ruthenium, osmium, palladium, platinum, and combinations thereof;

positioning a first portion of a polishing surface for contact with the Group VIII metal-containing layer;  
providing a planarization composition in proximity to the contact between the polishing surface and the Group VIII metal-containing layer;  
5 and  
planarizing the Group VIII metal-containing layer;  
wherein the planarization composition comprises an organic amine and an organic chelating acid.

10

51. The method of claim 50 wherein the planarization composition further comprises an oxidizing agent.

52. A planarization method for use in forming a capacitor or barrier layer,  
15 the method comprising:

providing a semiconductor substrate or substrate assembly having a patterned dielectric layer formed thereon and a Group VIII metal-containing layer formed over the patterned dielectric layer, wherein the Group VIII metal is selected from the group consisting of rhodium,  
20 iridium, ruthenium, osmium, palladium, platinum, and combinations thereof;

positioning a first portion of a polishing surface for contact with the Group VIII metal-containing layer;  
providing a planarization composition in proximity to the contact  
25 between the polishing surface and the Group VIII metal-containing layer;

and  
planarizing the Group VIII metal-containing layer;  
wherein the planarization composition comprises abrasive  
30 particles and a complexing agent; and  
further wherein a majority of the plurality of abrasive particles are CeO<sub>2</sub> abrasive particles.



53. The method of claim 52 wherein the planarization composition further comprises an oxidizing agent.

54. The method of claim 52 wherein the polishing surface comprises a  
5 polishing pad.

55. A planarization method for use in forming a capacitor or barrier layer, the method comprising:

10 providing a semiconductor substrate or substrate assembly having a patterned dielectric layer formed thereon and a Group VIII metal-containing layer formed over the patterned dielectric layer, wherein the Group VIII metal is selected from the group consisting of rhodium, iridium, ruthenium, osmium, palladium, platinum, and combinations thereof;

15 positioning a first portion of a polishing surface for contact with the Group VIII metal-containing layer;

providing a planarization composition in proximity to the contact between the polishing surface and the Group VIII metal-containing layer;

20 and

planarizing the Group VIII metal-containing layer;

wherein the planarization composition comprises a complexing agent selected from the group consisting of a cyclic diene, an organic amine, an organic chelating acid, and combinations thereof; and

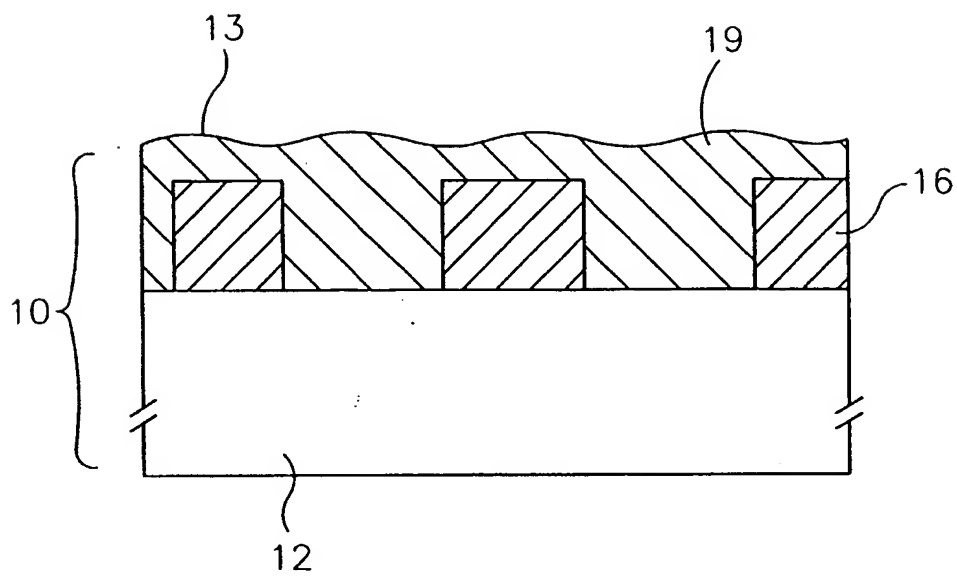
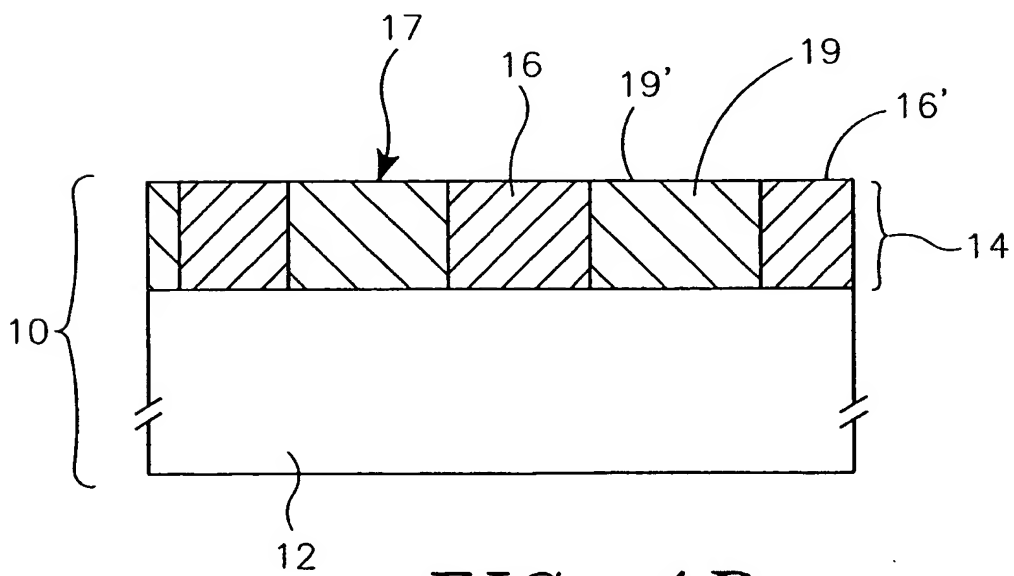
25 further wherein the method is carried out in one step.

56. The method of claim 55 wherein the planarization composition further comprises an oxidizing agent.

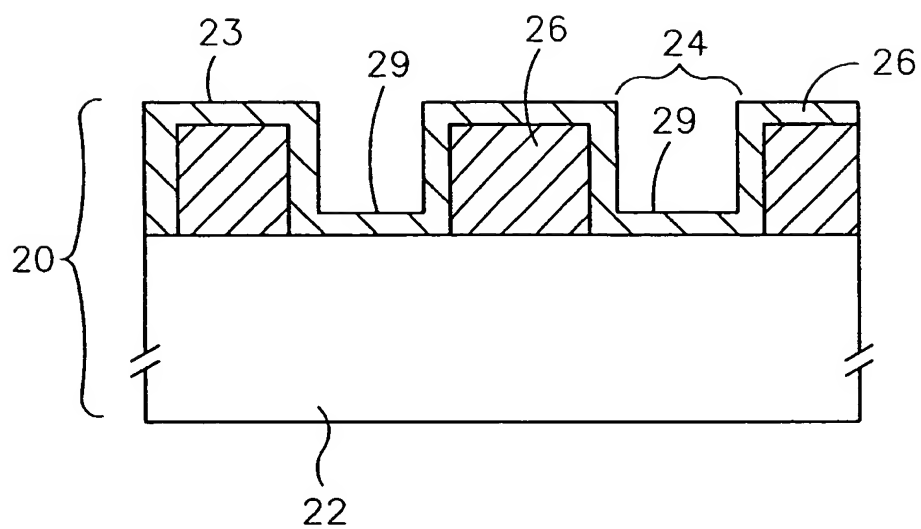
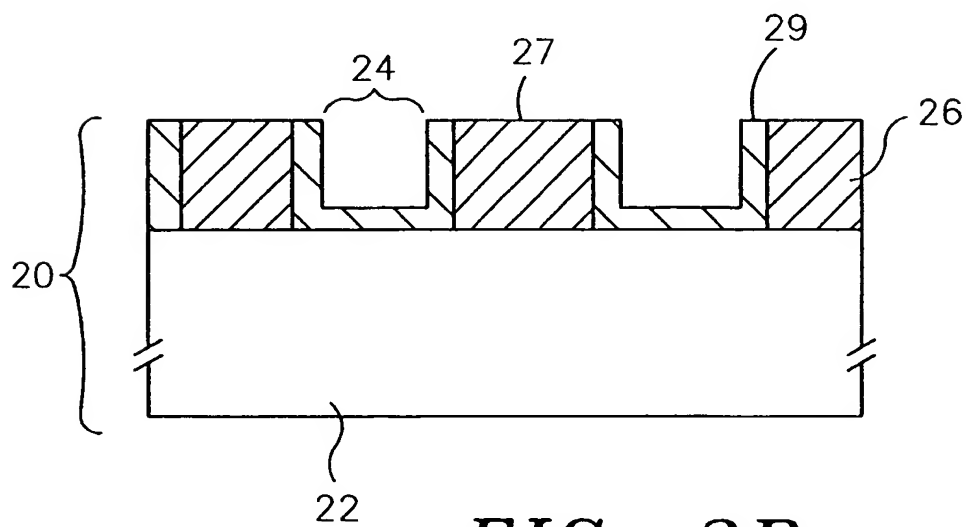
30 57. The method of claim 55 wherein the polishing surface comprises a polishing pad.

58. The method of claim 55 wherein the polishing surface comprises a fixed abrasive article.

1/2

*FIG. 1A**FIG. 1B*

2/2

*FIG. 2A**FIG. 2B*

## INTERNATIONAL SEARCH REPORT

Internat      Application No  
PCT/US 02/40413

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7    H01L21/321    C09G1/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7    H01L    C09G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, CHEM ABS Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 44396 A (RODEL HOLDINGS INC) 21 June 2001 (2001-06-21) the whole document ---	37,46, 55,57,58
X	EP 1 111 083 A (INFINEON TECHNOLOGIES AG) 27 June 2001 (2001-06-27)  column 5 -column 7 ---	37,38, 46,47, 55-57
X	EP 1 156 091 A (SIEMENS AG ;INFINEON TECHNOLOGIES AG (DE)) 21 November 2001 (2001-11-21) column 4 -column 5 ---	37,38, 46,47, 55-57
X	US 5 935 871 A (WATTS DAVID ET AL) 10 August 1999 (1999-08-10) column 4 ---  -/--	37,46, 55,57



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

## \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

26 March 2003

Date of mailing of the international search report

08/04/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Szarowski, A

## INTERNATIONAL SEARCH REPORT

Internal I Application No

PCT/US 02/40413

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2001/006031 A1 (ITAKURA TETSUYUKI ET AL) 5 July 2001 (2001-07-05) the whole document ---	37, 46, 55, 57
X	WO 00 77107 A (UNGER EUGEN ;BEITEL GERHARD (DE); SAENGER ANNETTE (DE); INFINEON T) 21 December 2000 (2000-12-21) the whole document ---	37, 38, 46, 47
X	EP 1 123 956 A (JSR CORP) 16 August 2001 (2001-08-16) the whole document ---	37, 38, 46, 47
P, X	WO 02 084718 A (CABOT MICROELECTRONICS CORP) 24 October 2002 (2002-10-24) the whole document ---	37, 46, 55, 57, 58
E	US 6 527 622 B1 (DE REGE FRANCESCO M ET AL) 4 March 2003 (2003-03-04) the whole document -----	37, 38, 46, 47, 55-58

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 1-36,39-45,48-54

In view of the large number, the overlapping scope and also the functional wording of the claims presently on file, which render it difficult, if not impossible, to determine the matter for which protection is sought, the present application fails to comply with the clarity and conciseness requirements of Article 6 PCT (see also Rule 6.1(a) PCT) to such an extent that a meaningful search is impossible.

Consequently, the search has been carried out for those parts of the application which do appear to be clear (and concise), namely claims 37,38,46,47,55-58.

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US 02/40413

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☒ Claims Nos.: 1-36, 39-45, 48-54  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:  
see FURTHER INFORMATION sheet PCT/ISA/210
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple Inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

## INTERNATIONAL SEARCH REPORT

Information on patent family members

Internati

Application No

PCT/US 02/40413

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0144396	A	21-06-2001	EP 1252247 A1	30-10-2002
			EP 1252248 A1	30-10-2002
			WO 0144395 A1	21-06-2001
			WO 0144396 A1	21-06-2001
			US 2002083650 A1	04-07-2002
			US 2003006396 A1	09-01-2003
			US 2002111027 A1	15-08-2002
			US 6379406 B1	30-04-2002
			US 2002039839 A1	04-04-2002
EP 1111083	A	27-06-2001	DE 19959711 A1	21-06-2001
			EP 1111083 A2	27-06-2001
			US 2002008265 A1	24-01-2002
EP 1156091	A	21-11-2001	DE 10024874 A1	29-11-2001
			CN 1324906 A	05-12-2001
			EP 1156091 A1	21-11-2001
			JP 2002033298 A	31-01-2002
			US 2002017063 A1	14-02-2002
US 5935871	A	10-08-1999	NONE	
US 2001006031	A1	05-07-2001	JP 2001187877 A	10-07-2001
WO 0077107	A	21-12-2000	DE 19927286 A1	18-01-2001
			WO 0077107 A1	21-12-2000
			US 2002081853 A1	27-06-2002
EP 1123956	A	16-08-2001	EP 1123956 A1	16-08-2001
			JP 2002080827 A	22-03-2002
			US 2001039766 A1	15-11-2001
WO 02084718	A	24-10-2002	WO 02084718 A1	24-10-2002
			US 2002151177 A1	17-10-2002
US 6527622	B1	04-03-2003	NONE	



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**